



INSTALLATION MANUAL

TOOLS NEEDED

PUTTY KNIFE
(for disassembly)



UTILITY RAZOR
KNIFE
(for trimming)





Illustration 3



GENERAL INFORMATION

There are two parts to the Sportgrid locking system.

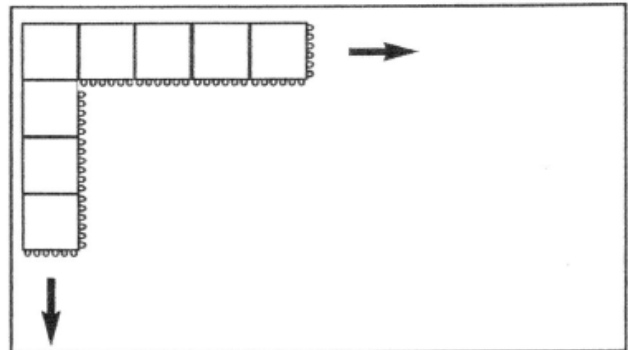

The Male Peg




The Female Loop

All tiles on any given installation should ALWAYS HAVE THE FEMALE LOOPS GOING THE SAME DIRECTION. (illustration 1)


CAUTION: If you inadvertently rotate a tile 90° it will snap into place (illustration 2) but you will not be able to complete the installation properly.

Illustration 1



right

Illustration 2



wrong

DISASSEMBLY

Insert putty knife between male and female lock. Tilt knife away from male peg so that the male lip unlocks and lifts out (see illustration 4)

Illustration 4



(side view)

ASSEMBLY

Always begin with the installation in one corner, pointing the female loops in the direction that additional tiles are to be added.

CLEANING

OUTDOOR INSTALLATIONS

An occasional rain shower or hosing is all that is necessary to keep the Sportgrid surface clean.

A electric leaf blower can be used to blow leaves away. Snow can be removed with a snow blower or snow shovel (plastic edge works best).